


# ATO Kit

A Reliable Water Top Off System




## Setup Scenarios


Mode A (Scenario 1) Recommended Method

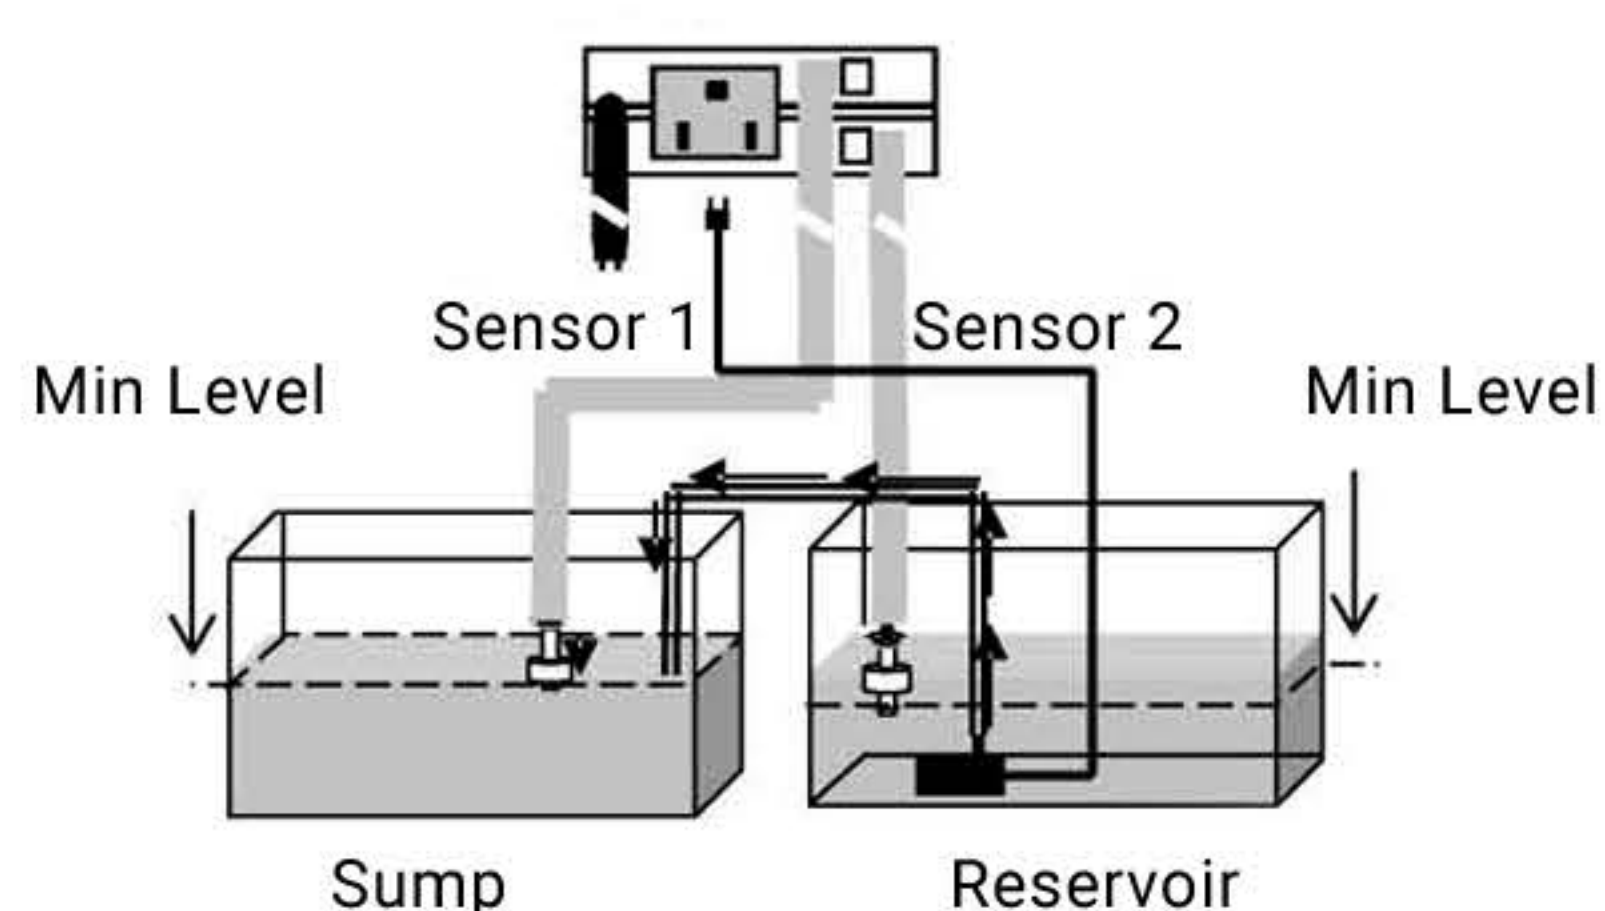

Mode A (Scenario 2)

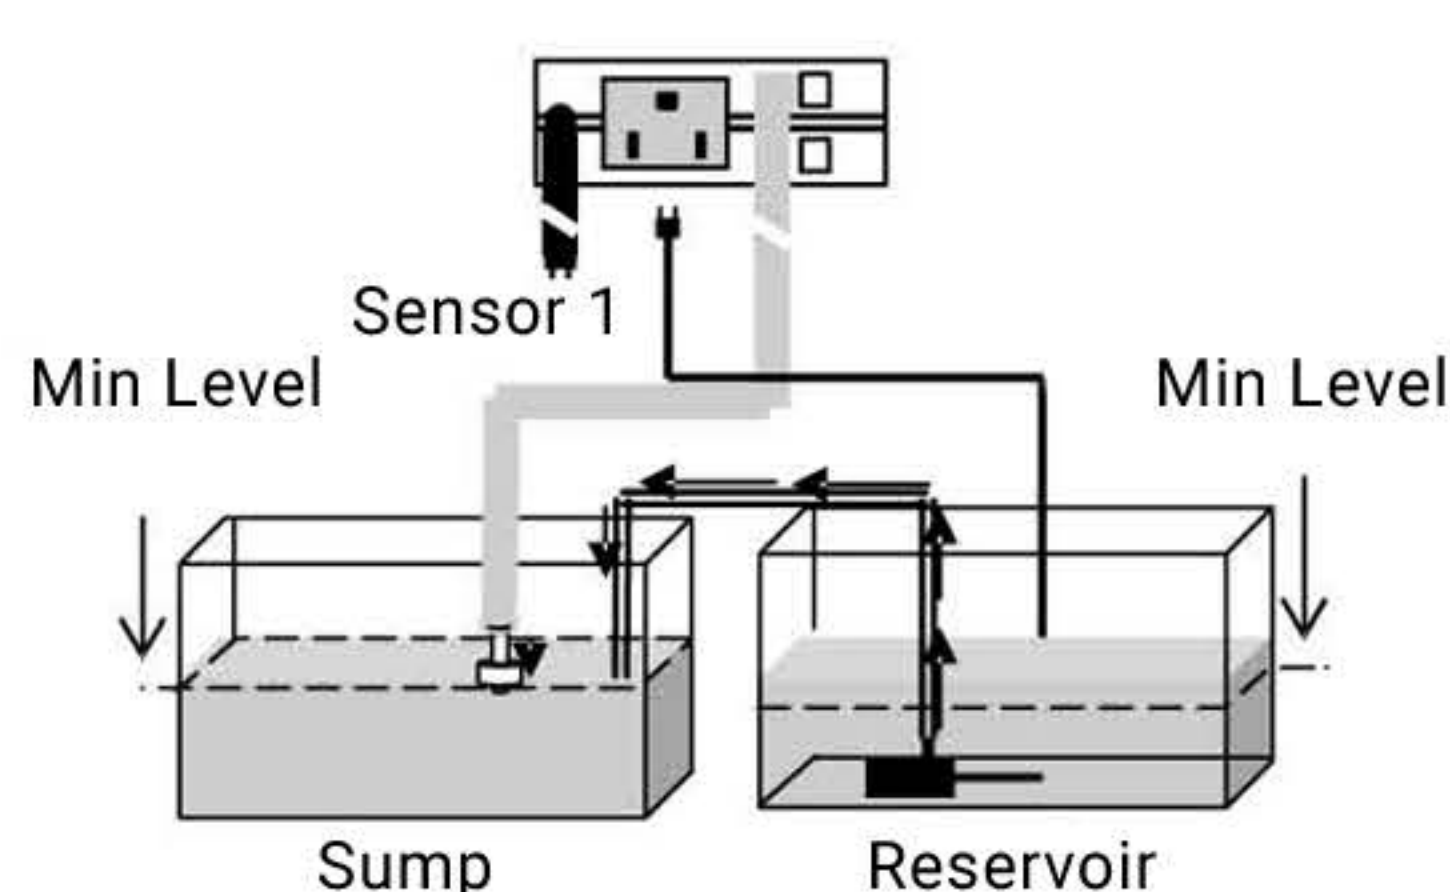

Mode B (Scenario 3)

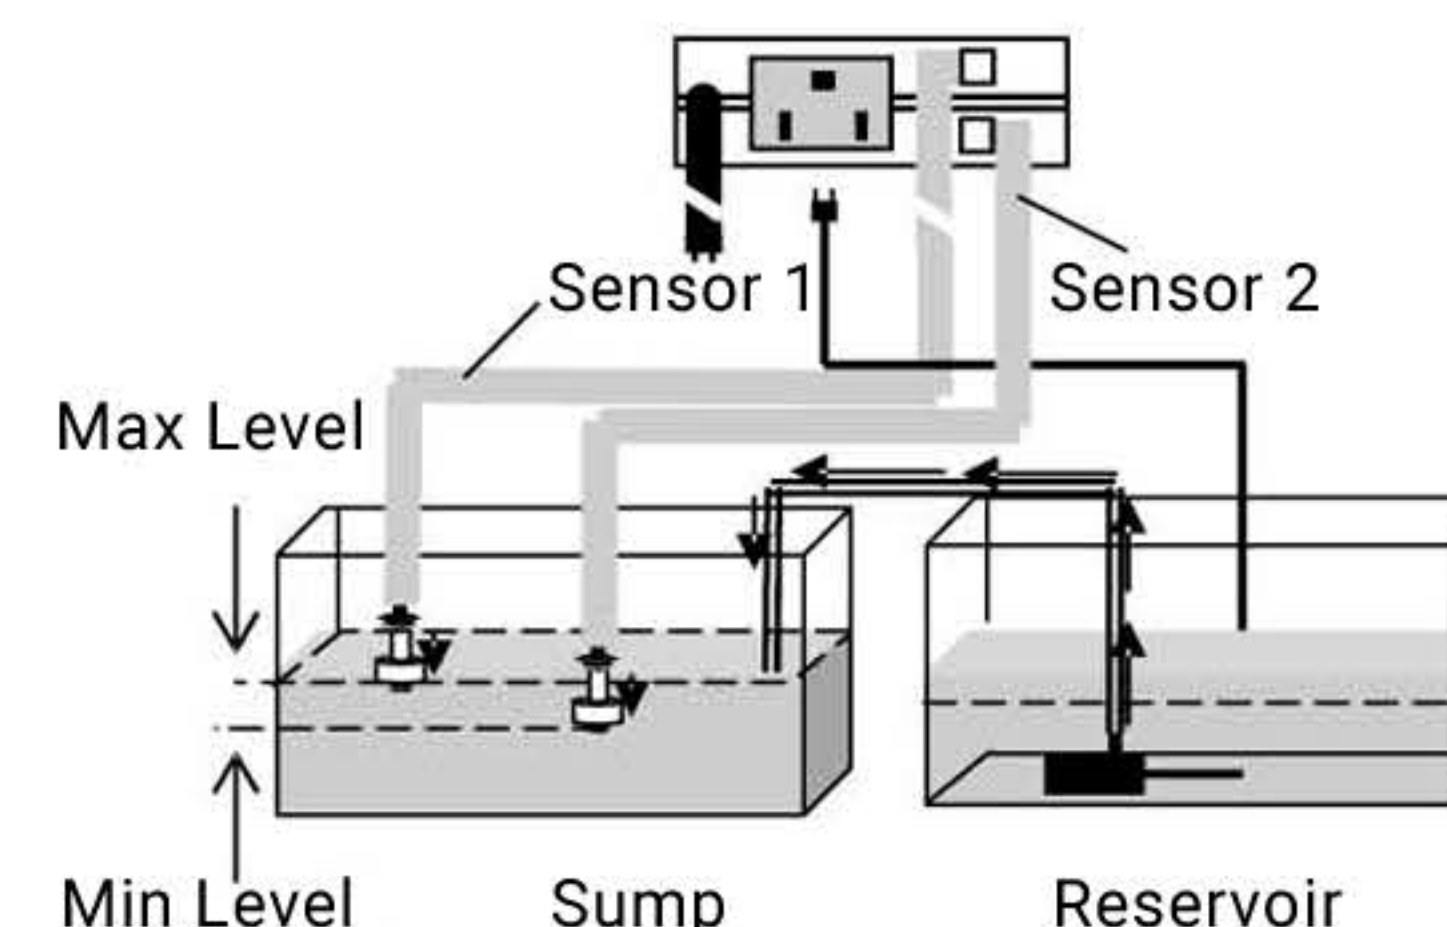

### ATO Controller

Our compact electronic controller is easy to mount out of sight. An optional audible chime alerts you when in operation mode.



### Float Sensors

Dual float sensors activate within seconds of detecting a change in water level, and an exterior guard protects sensors from snails.



### Multi Mode

With two operating modes to choose from and dual float sensors, it's easy to customize the JBJ ATO Kit to suit most aquarium and sump set-ups.



### Safe Stop

Float sensors automatically stop power to your return pump in the event that your reservoir is low on water, and a built-in timer prevents overfilling.

#### Technical Specifications

Model	Dimensions	Flow Rate	Max Head Pressure	Power Consumption
ATO	2.75" x 1.5" x 4.5"	—	—	10 W
FP-150	2" x 2" x 2"	40 gal/h (150 L/h)	2 ft (0.6 m)	2.5 W at max flow

#### Power Specifications

#### What's in the Box

- ATO Controller
- Mounting Brackets
- Float Sensor (x2)
- Flexible Tubing
- Submersible Pump